








F4L
HP 40 / 75 - KW 29 / 56

ROTARY CULTIVATOR WITH SIDE GEAR TRANSMISSION AND THREE-SPEED LEVER OPERATED GEARBOX

F4L

HP 40 / 75 - KW 29 / 56

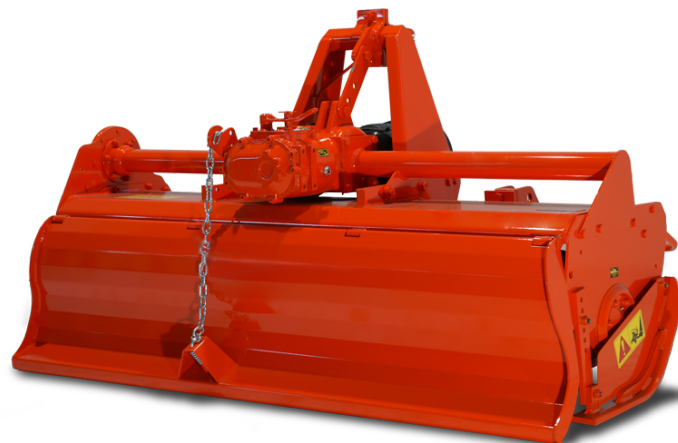

STANDARD EQUIPMENT

- Safety guards CE
- Three-point hitch
- Rotor with four curved blades per disc
- Depth regulating skids
- PTO shaft with clutch
- PTO 540 rpm
- Three-speed lever gear change (Rotor speed: 1°-195 rpm, 2°-230 rpm, 3°-270 rpm)

OPTIONS

- PTO shaft (Cuna) with clutch
- Rotor with six blades per disc
- Front wheels in iron
- Pair of track eradicators
- Front sod breaking discs
- Spike or Cage roller
- Packer roller

ALTERNATIVES

- 90° blades
- Rotor with blades facing inwards

MODELLO	 cm	 cm	 cm	 HP KW	 cm	 .N	 .Kg
F4L-210	226	210	105__105	45 - 75	20	9	541
F4L-185	201	185	92__93	45 - 75	20	8	529
F4L-170	186	170	85__85	45 - 75	20	7	510
F4L-160	172	160	80__80	40 - 75	20	7	502
F4L-150	162	150	75__75	40 - 75	20	6	491
F4L-145	157	145	73__73	40 - 75	20	6	486
F4L-135	147	135	67__68	35 - 55	20	6	482