













H6

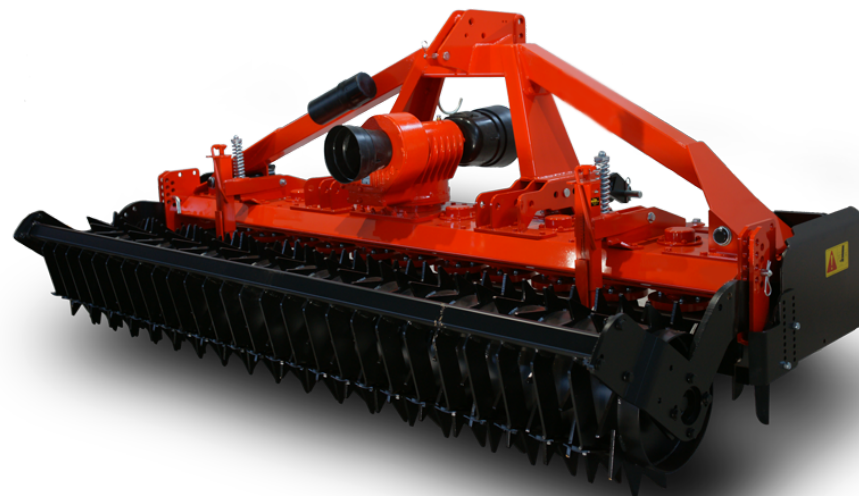
HP 100 / 200 - KW 73 / 148

POWER HARROW WITH FOUR-SPEED GEARBOX (Standard Version)
for tractors with 100 to 200 Hp (74 - 148 Kw) with gear change

H6

HP 100 / 200 - KW 73 / 148

| | STANDARD | | OPTION 1 | | OPTION 2 | | OPTION 3 | |
|---|---|---|---|---|---|--|---|---|
|  |  |  |  |  |  |  |  |  |
| |  g/m | | | | rpm U/min tr/min | | | |
| 540 g/m | 187 | — | 267 | 345 | 202 | — | 225 | 410 |
| 750 g/m | 260 | — | 371 | — | 281 | — | 312 | — |
| 1000 g/m | 347 | — | — | — | 375 | — | 416 | — |












STANDARD EQUIPMENT

- Safety guards
- PTO 540 rpm for models 300-400
- PTO 1000 rpm for models 450 and 500
- Four-speed manual gear change for models 300-400
- Two-speed lever gear change + two-speed manual gear change for models 450 and 500
- PTO shaft with clutch
- Protection from stones, removable
- Three-point hitch (Category 2 and 3) with oscillating arms
- Rear roller (Packer Ø 513mm exterior, Ø 355 mm tube)
- Moveable side-plates
- Rear PTO
- Soil refinement bar with manual jacks

OPTIONS

- 35 cm tines
- Pair of hydraulic jacks for rear roller regulation
- Packer roller Ø 615 mm exterior, Ø 457 mm tube
- PTO shaft with cam limiter
- Pair of track eradicators

| MODELLO |  cm |  cm |  cm |  HP KW |  cm |  .N |  .Kg |  Kg |  Kg |
|---------|---|---|---|--|---|---|--|---|---|
| H6-500 | 505 | 500 | 250__250 | 180-200 133-148 | 40 | 20 | 20 DX+20 | 2111 | 2202 |
| H6-450 | 455 | 450 | 225__225 | 160-200 118-148 | 36 | 18 | 18 DX+18 SX | 2039 | 2137 |
| H6-400 | 405 | 400 | 200__200 | 140-180 103-133 | 32 | 16 | 16 DX+16 SX | 1938 | 2043 |
| H6-350 | 355 | 350 | 175__175 | 120-180 88-133 | 28 | 14 | 14 DX+14 SX | 1756 | 1862 |
| H6-300 | 305 | 300 | 150__150 | 100-120 73-118 | 12 | 12 | 12 DX+12 SX | 1440 | 1560 |