



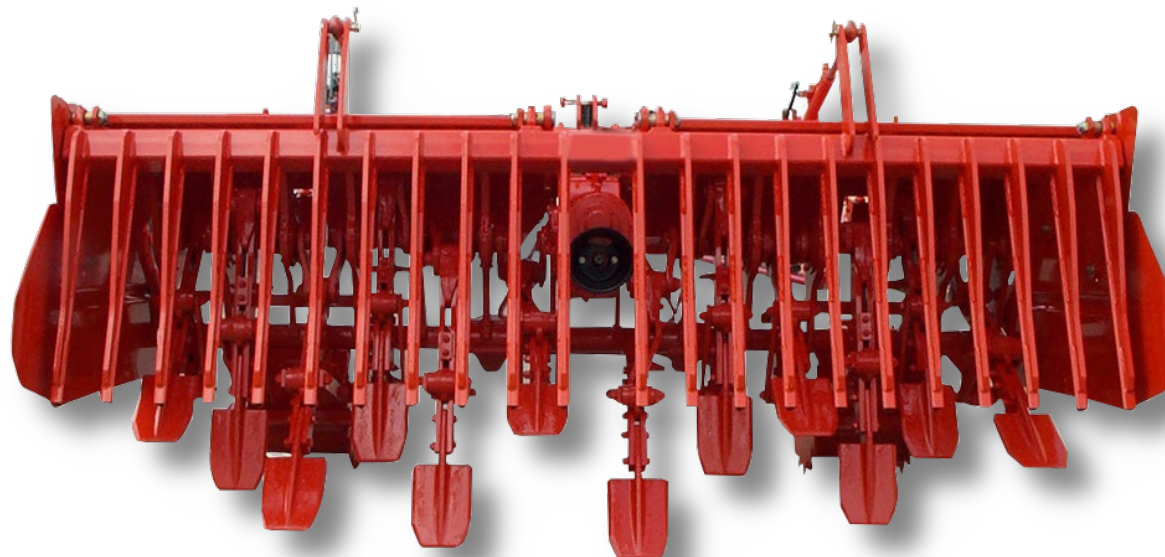
**V45**

HP 90 / 195 - KW 66 / 143

DEEP SPADER WITH THREE-SPEED LEVER OPERATED GEARBOX

# V45

HP 90 / 195 - KW 66 / 143










## STANDARD EQUIPMENT

- Safety guards CE
- Three-point hitch
- Leveling rake
- Three-speed lever gear change
- Side guards
- PTO shaft with pawl limiter for models 350 and 400
- PTO shaft with clutch for models 185 - 300
- Rake regulating jack
- Manual jack for wheel depth regulation
- PTO 1000 rpm
- Gauge wheels
- Rear PTO
- External frame supports
- Oil cooling kit for models 350 and 400

## OPTIONS

- Rear hydraulic three-point hitch
- Oil cooling kit (necessary for tractors above 160 HP)
- PTO shaft with pawl limiter (necessary for tractors above 160 HP)
- Hydraulic jacks for rake regulation
- Hydraulic jacks for wheel depth regulation
- Transport trolley kit
- Rotary skids instead of wheels
- Extension kit for three-point hitch

MODELLO	 cm	 cm	 cm	 HP    KW	 cm	 .N	 .Kg
V45-400	425	400	200 — 200	180 - 195	45	14	3062
V45-350	373	350	175 — 175	160 - 195	45	12	2688
V45-300	316	300	150 — 150	140 - 195	45	10	2415
V45-250	260	250	125 — 125	100 - 195	45	8	2120
V45-185	190	185	92 — 92	90 - 110	45	6	1447